


DATA MESSAGE & TYPE DEFINITION SCHEMAS

Set forth below is a schema model showing the data message to be disseminated through the subscription. Within the message are information containers (Submission, Offering, Issue, Securities, Document, File, and Underwriter) and the information types and values associated with each.

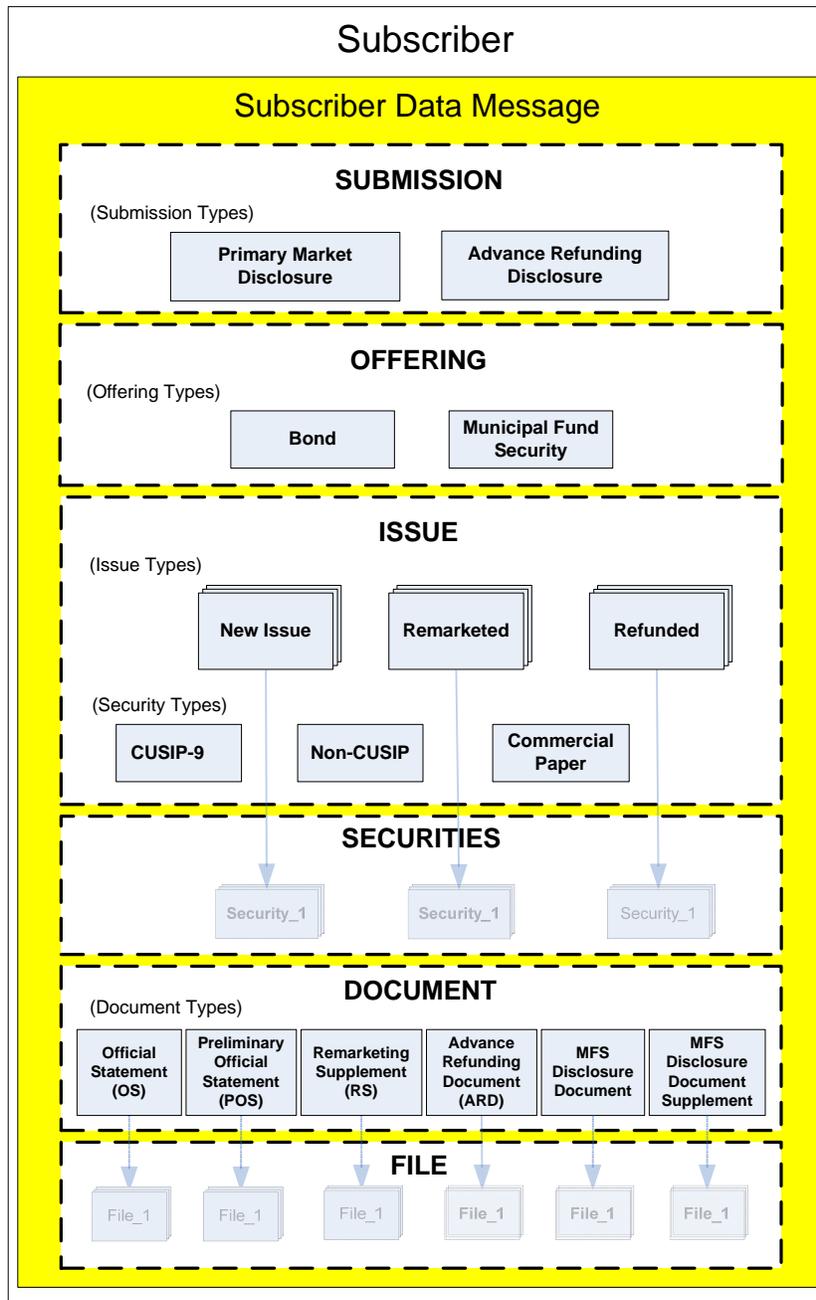

XML MESSAGE SCHEMAS

Detailed below are Data, Document and Type Definition schemas. The Data and Document schemas describe the base structural containers which in turn reference child-level containers and specifications described in the Type Definition schema.

Data Message Schema

```
<?xml version="1.0"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns="EMMA-SUBSCRIPTION-XML" targetNamespace="EMMA-SUBSCRIPTION-XML"
elementFormDefault="qualified" attributeFormDefault="unqualified" version="1.0">
  <xs:include
    schemaLocation="C:\EMMA\EMMA_B2B\Schema\PrimaryMarket\Subscription\EMMA_B2B_SUBSCRIPTION_TypeDefinition_Schema_v15.xsd"/>
  <xs:element name="SubscriptionDataMessage" type="SubscriptionDataMessageType"/>
  <!-- Type Definition starts -->
  <xs:complexType name="SubscriptionDataMessageType">
    <xs:sequence>
      <xs:element name="Submission" type="SubmissionDetailsType" maxOccurs="unbounded"/>
    </xs:sequence>
    <xs:attribute name="SubmissionTransactionCount" type="xs:integer"/>
    <xs:attribute name="ReplayDate" type="ISODate"/>
  </xs:complexType>
  <xs:complexType name="SubmissionDetailsType">
    <xs:sequence>
      <xs:element name="Offering" type="OfferingDetailsType" minOccurs="1" maxOccurs="1"/>
      <xs:element name="Document" type="DocumentDetailsType" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element name="OSAvailabilityContactInformation" type="OSAvailabilityContactInformationType" minOccurs="0"
        maxOccurs="1"/>
    </xs:sequence>
    <xs:attribute name="SubmissionIdentifier" type="Max25Text" use="required"/>
    <xs:attribute name="SubmissionType" type="SubmissionType" use="required"/>
    <xs:attribute name="SubmissionStatus" type="SubmissionStatusType"/>
    <xs:attribute name="SubmissionTransactionDateTime" type="ISODateTime"/>
  </xs:complexType>
</xs:schema>
```

Document Message Schema

```

<?xml version="1.0"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns="EMMA-SUBMISSION-XML" targetNamespace="EMMA-SUBMISSION-XML"
elementFormDefault="qualified" attributeFormDefault="unqualified" version="1.0">
  <xs:include schemaLocation="..."/>
  <xs:element name="SubscriptionDocumentMessage" type="SubscriptionDocumentMessageType"/>
  <!-- Type Definition starts -->
  <xs:complexType name="SubscriptionDocumentMessageType">
    <xs:sequence>
      <xs:element name="File" type="FileDetailsType" minOccurs="1" maxOccurs="1"/>
    </xs:sequence>
  </xs:complexType>
  <!-- Type definition ends -->
</xs:schema>

```

Type Definition Schema

```

<?xml version="1.0"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" elementFormDefault="qualified" attributeFormDefault="unqualified" version="1.0">
  <!-- Type Definition starts -->
  <xs:complexType name="OfferingDetailsType">
    <xs:sequence>
      <xs:element name="Issue" type="IssuesType" maxOccurs="unbounded"/>
      <xs:element name="CUSIP9OfLatestMaturityOnIssueNotUnderwritten" type="Cusip9Type" minOccurs="0"
maxOccurs="unbounded"/>
    </xs:sequence>
    <xs:attribute name="OfferingType" type="OfferingType"/>
    <xs:attribute name="OSAvailabilityStatus" type="OSAvailabilityStatusType"/>
    <xs:attribute name="POSAvailabilityStatus" type="POSAvailabilityStatusType"/>
    <xs:attribute name="UnderwritingSpreadDisclosureIndicator" type="UnderwritingSpreadDisclosureIndicatorType"/>
    <xs:attribute name="UnderwritingSpread" type="xs:float"/>
  </xs:complexType>
  <xs:complexType name="IssuesType">
    <xs:sequence>
      <xs:element name="OriginalCUSIP9OfRemarketedSecurity" type="Cusip9Type" minOccurs="0" maxOccurs="unbounded"/>
      <xs:element name="UnderlyingSecurities" type="UnderlyingSecuritiesType" minOccurs="0" maxOccurs="1"/>
    </xs:sequence>
  </xs:complexType>

```

```

<xs:attribute name="IssueType" type="IssueType"/>
<xs:attribute name="SecurityType" type="SecurityType"/>
<xs:attribute name="IssueDescription" type="Max250Text"/>
<xs:attribute name="IssuerName" type="Max250Text"/>
<xs:attribute name="IssuerState" type="StateCode"/>
<xs:attribute name="IssueClosingDate" type="ISODate"/>
<xs:attribute name="IssueDatedDate" type="ISODate"/>
<xs:attribute name="OriginalDatedDate" type="ISODate"/>
<xs:attribute name="CUSIP6" type="Cusip6Type"/>
</xs:complexType>
<xs:complexType name="UnderlyingSecuritiesType">
  <xs:sequence>
    <xs:element name="Security" type="SecurityDetailsType" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="SecurityDetailsType">
  <xs:attribute name="CUSIP9" type="Cusip9Type"/>
  <xs:attribute name="MaturityDate" type="ISODate"/>
  <xs:attribute name="SecurityDatedDate" type="ISODate"/>
  <xs:attribute name="InitialOfferingPriceYield" type="xs:float"/>
  <xs:attribute name="MaturityPrincipalAmount" type="xs:decimal"/>
  <xs:attribute name="InterestRate" type="xs:decimal"/>
  <xs:attribute name="SecurityStatus" type="SecurityStatusType"/>
  <xs:attribute name="ParValueUnderwritten" type="xs:decimal"/>
  <xs:attribute name="OriginalCUSIP9OfRefundedSecurity" type="Cusip9Type"/>
  <xs:attribute name="NewCUSIP9OfUnrefundedBalance" type="Cusip9Type"/>
  <xs:attribute name="NewCUSIP9OfRefundedSecurity" type="Cusip9Type"/>
</xs:complexType>
<xs:complexType name="DocumentDetailsType">
  <xs:sequence>
    <xs:element name="CUSIP9IdentifierOfRefundingIssue" type="Cusip9Type" minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="OriginalCUSIP9OfRefundedSecurity" type="Cusip9Type" minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="UnderlyingFiles" type="UnderlyingFilesType" maxOccurs="1"/>
  </xs:sequence>
  <xs:attribute name="DocumentIdentifier" type="Max25Text"/>
  <xs:attribute name="DocumentType" type="DocumentType"/>
  <xs:attribute name="DocumentDescription" type="Max75Text"/>
  <xs:attribute name="DocumentStatus" type="DocumentStatusType"/>

```

```

    <xs:attribute name="DocumentPostingDate" type="ISODate"/>
    <xs:attribute name="DocumentArchiveDate" type="ISODate"/>
    <xs:attribute name="DocumentRemoveDate" type="ISODate"/>
  </xs:complexType>
  <xs:complexType name="UnderlyingFilesType">
    <xs:sequence>
      <xs:element name="File" type="FileDetailsType" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
  <xs:complexType name="FileDetailsType">
    <xs:attribute name="FileIdentifier" type="Max25Text"/>
    <xs:attribute name="FileOrder" type="xs:integer"/>
    <xs:attribute name="EffectiveDate" type="ISODate"/>
    <xs:attribute name="FileStatus" type="DocumentStatusType"/>
    <xs:attribute name="FilePostingDate" type="ISODate"/>
    <xs:attribute name="FileArchiveDate" type="ISODate"/>
    <xs:attribute name="FileRemoveDate" type="ISODate"/>
  </xs:complexType>
  <xs:complexType name="OSAvailabilityContactInformationType">
    <xs:attribute name="OSContactOrganizationName" type="Max140Text"/>
    <xs:attribute name="OSContactFirstName" type="Max25Text"/>
    <xs:attribute name="OSContactLastName" type="Max25Text"/>
    <xs:attribute name="OSContactTitle" type="Max140Text"/>
    <xs:attribute name="OSContactPhoneNumber" type="Max15Text"/>
    <xs:attribute name="OSContactPhoneNumberExtension" type="Max6Text"/>
    <xs:attribute name="OSContactAddress" type="Max140Text"/>
    <xs:attribute name="OSContactCity" type="Max25Text"/>
    <xs:attribute name="OSContactState" type="StateCode"/>
    <xs:attribute name="OSContactZipCode" type="Max15Text"/>
    <xs:attribute name="OSContactEMailAddress" type="Max50Text"/>
  </xs:complexType>
  <xs:simpleType name="SubmissionType">
    <xs:restriction base="xs:string">
      <xs:enumeration value="PrimaryMarketDisclosure"/>
      <xs:enumeration value="AdvanceRefundingDisclosure"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:simpleType name="SubmissionStatusType">

```

```

    <xs:restriction base="xs:string">
      <xs:enumeration value="Publish"/>
      <xs:enumeration value="NoticeOfCancellationOfOffering"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:simpleType name="OfferingType">
    <xs:restriction base="xs:string">
      <xs:enumeration value="Bond"/>
      <xs:enumeration value="MunicipalFundSecurity"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:simpleType name="IssueType">
    <xs:restriction base="xs:string">
      <xs:enumeration value="NewIssue"/>
      <xs:enumeration value="Remarketed"/>
      <xs:enumeration value="Refunded"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:simpleType name="SecurityType">
    <xs:restriction base="xs:string">
      <xs:enumeration value="CUSIP-9"/>
      <xs:enumeration value="CommercialPaper"/>
      <xs:enumeration value="non-CUSIP"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:simpleType name="SecurityStatusType">
    <xs:restriction base="xs:string">
      <xs:enumeration value="Underwritten"/>
      <xs:enumeration value="PartiallyUnderwritten"/>
      <xs:enumeration value="NotUnderwritten"/>
      <xs:enumeration value="Remarketed"/>
      <xs:enumeration value="NotRemarketed"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:simpleType name="DocumentType">
    <xs:restriction base="xs:string">
      <xs:enumeration value="OfficialStatement"/>
      <xs:enumeration value="PreliminaryOfficialStatement"/>
    </xs:restriction>
  </xs:simpleType>

```

```

        <xs:enumeration value="AdvanceRefundingDocument"/>
        <xs:enumeration value="RemarketingSupplement"/>
        <xs:enumeration value="MFSDisclosureDocument"/>
        <xs:enumeration value="MFSDisclosureDocumentSupplement"/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="DocumentStatusType">
    <xs:restriction base="xs:string">
        <xs:enumeration value="Current"/>
        <xs:enumeration value="Archived"/>
        <xs:enumeration value="Removed"/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="POSAvailabilityStatusType">
    <xs:restriction base="xs:string">
        <xs:enumeration value="POSSubmitted"/>
        <xs:enumeration value="NoPOSPrepared"/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="OSAvailabilityStatusType">
    <xs:restriction base="xs:string">
        <xs:enumeration value="OSNotAvailableAtClosing"/>
        <xs:enumeration value="OSAvailableOnlyFromUnderwriter_15c212ExemptLimitedOffering"/>
        <xs:enumeration value="OSNotProduced_15c212ExemptLimitedOffering"/>
        <xs:enumeration value="OSNotProduced_15c212ExemptShortTermOffering"/>
        <xs:enumeration value="OSNotProduced_15c212ExemptPuttableOffering"/>
        <xs:enumeration value="OSNotProduced_15c212ExemptSmallOffering"/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="UnderwritingSpreadDisclosureIndicatorType">
    <xs:restriction base="xs:string">
        <xs:enumeration value="DisclosedInOfficialStatement"/>
        <xs:enumeration value="NotDisclosed_CompetitiveSale"/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="Cusip6Type">
    <xs:restriction base="xs:string">
        <xs:minLength value="6"/>
    </xs:restriction>

```

```

        <xs:maxLength value="6"/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="Cusip9Type">
    <xs:restriction base="xs:string">
        <xs:minLength value="9"/>
        <xs:maxLength value="9"/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="StateCode">
    <xs:restriction base="xs:string">
        <xs:pattern value="[A-Z]{2,2}"/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="ISODate">
    <xs:restriction base="xs:date"/>
</xs:simpleType>
<xs:simpleType name="ISODateTime">
    <xs:restriction base="xs:dateTime"/>
</xs:simpleType>
<xs:simpleType name="Max250Text">
    <xs:restriction base="xs:string">
        <xs:minLength value="1"/>
        <xs:maxLength value="250"/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="Max140Text">
    <xs:restriction base="xs:string">
        <xs:minLength value="1"/>
        <xs:maxLength value="140"/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="Max75Text">
    <xs:restriction base="xs:string">
        <xs:minLength value="1"/>
        <xs:maxLength value="75"/>
    </xs:restriction>
</xs:simpleType>

```

```
<xs:simpleType name="Max50Text">
  <xs:restriction base="xs:string">
    <xs:minLength value="1"/>
    <xs:maxLength value="50"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="Max25Text">
  <xs:restriction base="xs:string">
    <xs:minLength value="1"/>
    <xs:maxLength value="25"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="Max15Text">
  <xs:restriction base="xs:string">
    <xs:minLength value="1"/>
    <xs:maxLength value="15"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="Max6Text">
  <xs:restriction base="xs:string">
    <xs:minLength value="1"/>
    <xs:maxLength value="6"/>
  </xs:restriction>
</xs:simpleType>
<!-- Type definition ends -->
</xs:schema>
```

SUMMARY OF CHANGES FROM PRELIMINARY SPECIFICATIONS

(underlining indicates additions; strikethrough indicates deletions)

Data Message Schema:

- ```

<xs:complexType name="SubmissionDetailsType">
 <xs:sequence>
 <xs:element name="Offering" type="OfferingDetailsType" minOccurs="1" maxOccurs="1"/>
 <xs:element name="Document" type="DocumentDetailsType" minOccurs="0" maxOccurs="unbounded"/>
 <xs:element name="OSAvailabilityContactInformation" type="OSAvailabilityContactInformationType" minOccurs="0"
 maxOccurs="1 unbounded" />
 </xs:sequence>

```

### Type Definition Schema:

- ```

<xs:complexType name="OfferingDetailsType">
  <xs:sequence>
    <xs:element name="Issue" type="IssuesType" maxOccurs="unbounded"/>
    <xs:element name="CUSIP9OfLatestMaturityOnIssueNotUnderwritten" type="Cusip9Type" minOccurs="0"
      maxOccurs="unbounded"/>
  </xs:sequence>
  <xs:attribute name="OfferingType" type="OfferingType"/>
  <xs:attribute name="OSAvailabilityStatus" type="OSAvailabilityStatusType"/>
  <xs:attribute name="POSAvailabilityStatus" type="POSAvailabilityStatusType"/>
  <xs:attribute name="UnderwritingSpreadDisclosureIndicator" type="UnderwritingSpreadDisclosureIndicatorType"/>
  <xs:attribute name="UnderwritingSpread" type="xs:float"/>
</xs:complexType>

```
- ```

<xs:complexType name="SecurityDetailsType">
 <xs:attribute name="CUSIP9" type="Cusip9Type"/>
 <xs:attribute name="MaturityDate" type="ISODate"/>
 <xs:attribute name="SecurityDatedDate" type="ISODate"/>
 <xs:attribute name="InitialOfferingPriceYield" type="xs:float"/>
 <xs:attribute name="InitialOfferingPriceYieldRange" type="xs:float"/>
 <xs:attribute name="MaturityPrincipalAmount" type="xs:decimal"/>
 <xs:attribute name="InterestRate" type="xs:decimal"/>

```

```

<xs:attribute name="SecurityStatus UnderwrittenIndicator" type="SecurityStatusType UnderwrittenIndicatorType"/>
<xs:attribute name="ParValueUnderwritten" type="xs:decimal"/>
<xs:attribute name="OriginalCUSIP9OfRefundedSecurity" type="Cusip9Type"/>
<xs:attribute name="NewCUSIP9OfUnrefundedBalance" type="Cusip9Type"/>
<xs:attribute name="NewCUSIP9OfRefundedSecurity" type="Cusip9Type"/>
</xs:complexType>

```

- ```

<xs:complexType name="IssuesType">
  <xs:sequence>
    <xs:element name="OriginalCUSIP9OfRemarketedSecurity" type="Cusip9Type" minOccurs="0" maxOccurs="unbounded"/>
    <xs:element name="UnderlyingSecurities" type="UnderlyingSecuritiesType" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
  <xs:attribute name="IssueType" type="IssueType"/>
  <xs:attribute name="SecurityType" type="SecurityType"/>
  <xs:attribute name="IssueDescription" type="Max250Text"/>
  <xs:attribute name="IssuerName" type="Max250Text"/>
  <xs:attribute name="IssuerState" type="StateCode"/>
  <xs:attribute name="IssueClosingDate" type="ISODate"/>
  <xs:attribute name="IssueDatedDate" type="ISODate"/>
  <xs:attribute name="OriginalDatedDate" type="ISODate"/>
  <xs:attribute name="CUSIP6" type="Cusip6Type"/>
  <del><xs:element name="CUSIP9OfLatestMaturityOnIssueNotUnderwritten" type="Cusip9Type" minOccurs="0"
maxOccurs="unbounded"/></del>
</xs:complexType>

```

- ```

<xs:complexType name="DocumentDetailsType">
 <xs:sequence>
 <xs:element name="CUSIP9IdentifierOfRefundingIssue" type="Cusip9Type" minOccurs="0" maxOccurs="unbounded"/>
 <xs:element name="OriginalCUSIP9OfRefundedSecurity" type="Cusip9Type" minOccurs="0" maxOccurs="unbounded"/>
 <xs:element name="UnderlyingFiles" type="UnderlyingFilesType" maxOccurs="1"/>
 </xs:sequence>
 <xs:attribute name="DocumentIdentifier" type="Max25Text"/>
 <xs:attribute name="DocumentType" type="DocumentType"/>
 <xs:attribute name="DocumentDescription" type="Max75Text Max250Text"/>
 <xs:attribute name="DocumentStatus" type="DocumentStatusType"/>
 <xs:attribute name="DocumentPostingDate" type="ISODate"/>
 <xs:attribute name="DocumentArchiveDate" type="ISODate"/>

```

```

<xs:attribute name="DocumentRemoveDate" type="ISODate"/>
<xs:attribute name="DocumentPostingOperationIndicator" type="DocumentPostingOperationIndicatorType"/>
<xs:attribute name="DocumentDisclosureCompletionIndicator" type="DocumentDisclosureCompletionIndicatorType"/>
</xs:complexType>

```

- ```

<xs:complexType name="FileDetailsType">
  <xs:attribute name="FileIdentifier" type="Max25Text"/>
  <xs:attribute name="FileOrder" type="xs:integer"/>
  <xs:attribute name="EffectiveDate" type="ISODate"/>
  <xs:attribute name="FileStatus" type="DocumentStatusType"/>
  <xs:attribute name="FilePostingDate" type="ISODate"/>
  <xs:attribute name="FileArchiveDate" type="ISODate"/>
  <xs:attribute name="FileRemoveDate" type="ISODate"/>
</xs:complexType>

```
- ```

<xs:complexType name="OSAvailabilityContactInformationType">
 <xs:attribute name="OSContactOrganizationName" type="Max140Text"/>
 <xs:attribute name="OSContactFirstName" type="Max25Text"/>
 <xs:attribute name="OSContactLastName" type="Max25Text"/>
 <xs:attribute name="OSContactTitle" type="Max140Text"/>
 <xs:attribute name="OSContactPhoneNumber" type="Max15Text Max14Text"/>
 <xs:attribute name="OSContactPhoneNumberExtension" type="Max6Text"/>
 <xs:attribute name="OSContactAddress" type="Max140Text"/>
 <xs:attribute name="OSContactCity" type="Max25Text"/>
 <xs:attribute name="OSContactState" type="StateCode"/>
 <xs:attribute name="OSContactZipCode" type="Max15Text Max14Text"/>
 <xs:attribute name="OSContactEmailAddress" type="Max50Text Max140Text"/>
</xs:complexType>

```
- ```

<xs:simpleType name="SecurityType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="CUSIP-9"/>
    <xs:enumeration value="CommercialPaper CUSIP-6"/>
    <xs:enumeration value="non-CUSIP"/>
  </xs:restriction>
</xs:simpleType>

```

- <xs:simpleType name="SecurityStatusType">
<xs:restriction base="xs:string">
<xs:enumeration value="Underwritten"/>
<xs:enumeration value="PartiallyUnderwritten"/>
<xs:enumeration value="NotUnderwritten"/>
<xs:enumeration value="Remarketed"/>
<xs:enumeration value="NotRemarketed"/>
</xs:restriction>
</xs:simpleType>
- <xs:simpleType name="DocumentPostingOperationIndicatorType">
<xs:restriction base="xs:string">
<xs:enumeration value="AppendToPostedDocument"/>
<xs:enumeration value="ReplacePostedDocument"/>
</xs:restriction>
</xs:simpleType>
- <xs:simpleType name="DocumentStatusType">
 <xs:restriction base="xs:string">
 <xs:enumeration value="Current"/>
 <xs:enumeration value="Archived"/>
<xs:enumeration value="Removed"/>
 </xs:restriction>
 </xs:simpleType>
- <xs:simpleType name="DocumentDisclosureCompletionIndicatorType">
<xs:restriction base="xs:string">
<xs:enumeration value="Partial"/>
<xs:enumeration value="Complete"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="UnderwriterAssessmentDiscountIndicatorType">
<xs:restriction base="xs:string">
<xs:enumeration value="EntireOfferingMatures2YearsOrLess"/>
<xs:enumeration value="EntireOfferingPuttable2YearsOrLess"/>
</xs:restriction>
</xs:simpleType>

```

<xs:simpleType name="UnderwriterAssessmentExemptionIndicatorType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="OfferingLessThan1Million"/>
    <xs:enumeration value="EntireOfferingMatures9MonthsOrLess"/>
    <xs:enumeration value="EntireOfferingPuttable9MonthsOrLess"/>
    <xs:enumeration value="Rule15c212ExemptLimitedOffering"/>
  </xs:restriction>
</xs:simpleType>

```

- ```

<xs:simpleType name="UnderwrittenIndicatorType">
 <xs:restriction base="xs:string">
 <xs:enumeration value="NotUnderwritten"/>
 <xs:enumeration value="PartiallyUnderwritten"/>
 </xs:restriction>
</xs:simpleType>

```

- ```

<xs:simpleType name="Max75Text">
  <xs:restriction base="xs:string">
    <xs:minLength value="1"/>
    <xs:maxLength value="75"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="Max50Text">
  <xs:restriction base="xs:string">
    <xs:minLength value="1"/>
    <xs:maxLength value="50"/>
  </xs:restriction>
</xs:simpleType>

```

- ```

<xs:simpleType name="Max15Text Max14Text">
 <xs:restriction base="xs:string">
 <xs:minLength value="1"/>
 <xs:maxLength value="15 14"/>
 </xs:restriction>
</xs:simpleType>
<xs:simpleType name="Max10Text">
 <xs:restriction base="xs:string">
 <xs:minLength value="1"/>

```

```
<xs:maxLength value="10"/>
</xs:restriction>
</xs:simpleType>
```